


Rigid Wood (SPC)

Specifications

Updated: May 16, 2019

IN.id[®]

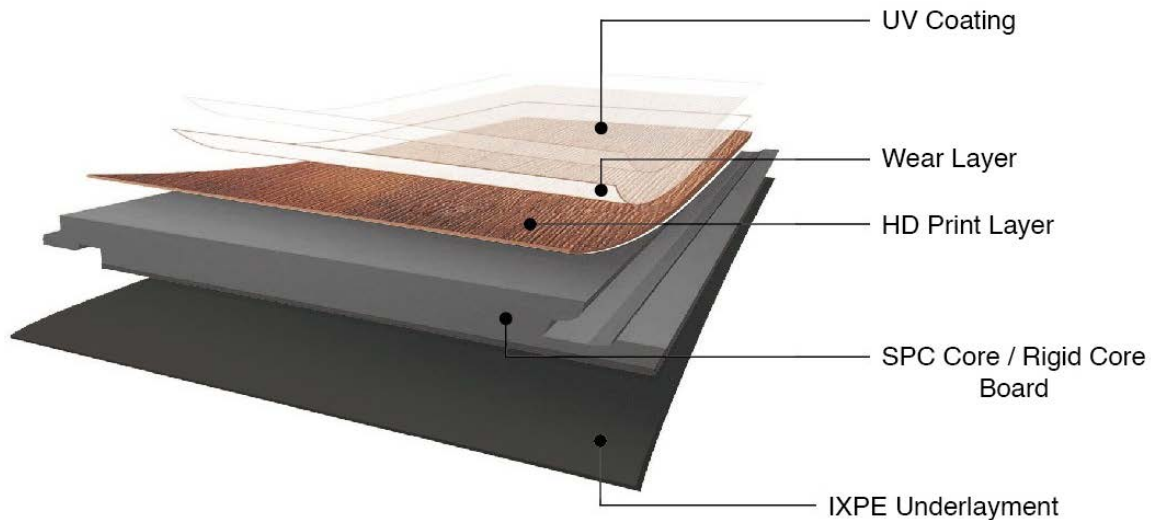

Product Description	Stone Plastic Composite
Dimension	8.9 in x 61 in
Thickness	6 mm
Wear Layer	0.5 mm 20 mil
Sq Ft. / Carton	30.16 sq/ft
Planks per Box	8

LIMITED LIGHT COMMERCIAL WARRANTY DISCALIMER:

THIS LIMITED LIGHT COMMERCIAL WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. ALL WARRANTIES ARE HEREBY BEING EXPRESSLY DISCLAIMED. IN.id, Inc. warrants SPC products to be free from manufacturing defects for a specified length of time from the date of purchase as set forth below. If a defect covered by this warranty is reported to IN.id, Inc. in writing within the specified length of warranty life (see below) from the time of purchase, IN.id, Inc. will furnish the SPC flooring of similar color, pattern, and defect-free. Based on the legitimacy of claim, IN.id, Inc. ensures one or up to all of the following:

Rigid Wood (SPC)

Specifications

Updated: May 16, 2019



- a) Repairing the defective area
- b) Replacing the floor if at our discretion, if deemed necessary
- c) In some rare cases, if your floor was professionally installed, we may also pay reasonable labor costs for the direct repairs or replacement after proper investigation has been conducted.

SPC Floors
<ul style="list-style-type: none">• 10 Years for Light Commercial Wear Warranty• 15 Years for Residential Wear Warranty

Fire Resistance	<i>Class C – Pass</i>	ASTM E 648
Coefficient of Friction	<i>Pass</i>	DIN 51130 / ASTM D2047-04
Smoke Density	<i>Pass</i>	ASTM E662-09
Short Term Indentation	<i>Pass</i>	ASTM F1914-98
Static Load	<i>Pass</i>	EN 433 / ASTM F970-07
Stain Resistance	<i>Pass</i>	ASTM F925
Peel Resistance	<i>Pass</i>	EN 431
Shear Resistance	<i>Pass</i>	EN 532
Color Fastness to Light	<i>Pass</i>	EN 649
Dimensional Stability	<i>Pass</i>	EN 434
Wear Resistance	<i>High</i>	ASTM F510-93
Formaldehyde Emission (air)	<i>None Detected – E1 Rating*</i>	EN 7171-1